

R-BG 108n.4 /445-450



Improved efficiency, maximum reliability and seamless integration into architectural roof design: High-performance module with TOPCon technology in full-black design



Maximum energy generation

TOPCon double-glass module with an impressive efficiency of 22.5 %, providing higher energy yield.



Aesthetic roof integration

The aesthetic and appealing full-black design blends well with modern architecture.



Extended longevity

Special combination of embedding materials guarantees maximum longevity and reliability.



Best cell quality

Exceptional reliability thanks to the exclusive use of Grade A cells. 100 % EL tested.



Improved warranty

Up to 30 years product warranty and 87.4 % performance guarantee after 30 years due to exceeded standards.

Certificates

- IEC 61215:2021 (module reliability)
- IEC 61730:2016 (module safety)
- IEC TS 62804-1:2015 (PID resistance)
- IEC 61701:2020 (salt mist resistance)
- IEC 62716:2013 (ammonia resistance)






R-BG 108n.4 /445-450

Mechanical data

Cell technology	TOPCon, monocrystalline
Cell size and quantity	182 mm x 93,4 mm; 108 half cells
Module dimensions	1762 mm x 1134 mm x 30 mm
Module weight	24.5 kg
Frame	Black anodised aluminium
Front glass	2.0 mm tempered solar glass with anti-reflective coating
Back glass	2.0 mm tempered solar glass
Junction box and IP rating	3 pcs with one bypass diode each, potted in accordance with IP68
Cable and connector	4 mm ² solar cable, length 120 cm, STÄUBLI MC4-Evo 2 connector

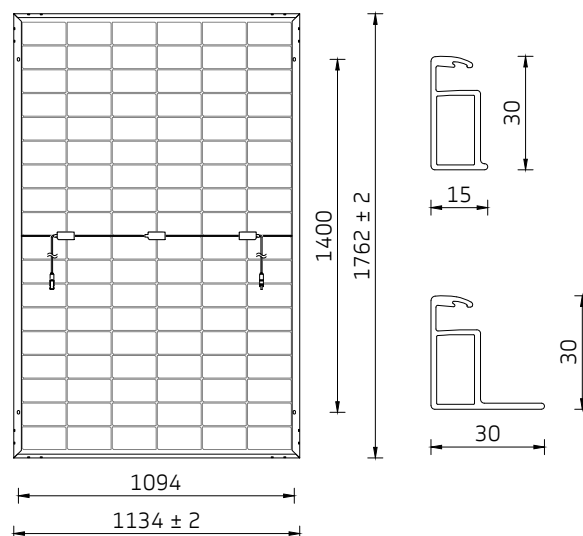

Electrical data

	445 Wp			450 Wp		
Conditions	STC	NMOT	BNPI	STC	NMOT	BNPI
STC power output P _{max} (Wp)	445	335	492	450	339	497
Nominal power voltage V _{mp} (V)	33.12	30.86	33.75	33.24	30.96	33.87
Nominal power current I _{mp} (A)	13.45	10.89	14.57	13.54	10.96	14.67
Open circuit voltage V _{oc} (V)	39.60	37.51	40.05	39.80	37.71	40.25
Short circuit current I _{sc} (A)	13.90	11.25	15.51	14.04	11.36	15.67
Bifacial coefficient (%)	80 ± 5			80 ± 5		
Module efficiency (%)	22.3			22.5		

Packaging

	36 modules vertically per pallet
	936 modules per truck
	936 kg per pallet

STC (nominal data under standard test conditions): irradiance 1000 W/m²; AM 1.5 spectrum; module temperature 25 °C; sorting for P_{max} 0 to +5 W, NMOT (nominal data at Nominal Module Operating Temperature): irradiance 800 W/m²; AM 1.5 spectrum; ambient temperature 20 °C; wind velocity 1 m/s, BNPI (Bifacial Nameplate Irradiance): irradiance 1000 W/m² at the front and 135 W/m² at the back; applied according to a method defined in IEC TS 60904-1-2. P_{max} tolerance: ±3.0 %; V_{oc}, V_{mp}, I_{sc}, I_{mp} tolerances: ±5.0 %.

Connection and operating conditions

Maximum system voltage	1500 V
Operating temperature range	-40 °C ... +85 °C
Mechanical resilience ¹	Pressure resistance tested at 5400 Pa Wind suction load resistance tested at 2400 Pa
Safety class	II
Reverse current overload	30 A
Fire classes ²	A (UL 790) B _{ROOF} (t1) nach DIN EN 13501-5:2016
Hail resistance	Hailstones up to 30 mm in size and at a speed of 23.9 m/s (HW3)

¹ Specified pressure load resistance: 3600 Pa and suction load resistance: 1600 Pa;
² For all roof slopes.

Temperature coefficients

TC of the maximum power (P _{max})	-0.29 %/°C
TC of open circuit voltage (V _{oc})	-0.25 %/°C
TC of short circuit current (I _{sc})	+0.048 %/°C
Nominal module operating temperature (NMOT)	42 ± 2

